

**TVT**

Secure The World With You



# TD-9422S2


2 MP Network IR Water-proof  
Bullet Camera

**TVT**

TVT DIGITAL TECHNOLOGY CO., LTD.




## 2 MP Network IR Water-proof Bullet Camera

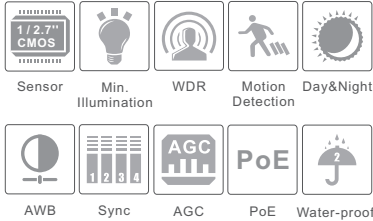

### Features

- 2MP ( 1920 x 1080 ) full real time coding
- Max. resolution:1920 x 1080
- ICR auto switch, true day / night
- 20 ~ 30m IR night view distance
- 3D DNR, digital WDR, ROI coding
- PoE power supply
- Support smart phone, iPad, remote monitoring
- IP66 ingress protection
- Support dual streams

### Dimensions

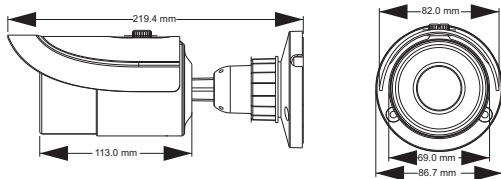

### Available Accessories



## Specifications

Model	TD-9422S2
<b>Specifications</b>	
<b>Camera</b>	
Image Sensor	1 / 2.7 "CMOS
Image Size	1920 x 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.007lux @F1.2, AGC ON; 0 lux with IR
Lens	2.8 mm @ F1.85, horizontal field of view : 102° 3.6 mm @ F2.0, horizontal field of view : 97° 6 mm @ F1.6, horizontal field of view : 54.5° 2.8 ~ 12 mm @ F1.4, horizontal field of view : 99.4° ~ 40.6°
Lens Mount	M12 or Φ14 optional
Day & Night	ICR
Wide Dynamic Range	Digital WDR
Digital NR	3D DNR
Angle Adjustment	Any angle
<b>Image</b>	
Video Compression	H.265 / H.264 / MJPEG
H.265 Compression Standard	Main Profile@Leve4.1 High Tier
Resolution	1080P ( 1920 x 1080 ), 720P ( 1280 x 720 ), D1, CIF, 480 x 240
Main Stream	60Hz : 1080P ( 1 ~ 30fps ) / 720P ( 1 ~ 30fps ) 50Hz : 1080P ( 1 ~ 25fps ) / 720P ( 1 ~ 25fps )
Bit Rate	256Kbps ~ 5Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI	Yes
<b>Interfaces</b>	
Network	RJ45
<b>Functions</b>	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users ; Support multi-stream real time transmission
Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, DDNS, SMTP, FTP
Interface Protocol	ONVIF
Storage	Network remote storage
Smart Alarm	Motion alarm
PoE	Yes
IR Distance	20 ~ 30 m
Water-proof	IP66
<b>Others</b>	
Power Supply	DC 12V / PoE
Power Consumption	< 6W
Operating Environment	- 30°C ~ 60°C, ≤95% humidity
Dimensions ( mm )	Φ87 × 219
Weight ( net )	560g
Installation	Wall mounting, ceiling mounting

### Available Model

Available Model	TD-9422S2 ( D / PE / IR2 )
	TD-9422S2 ( D / FZ / PE / IR2 )